

Drupal

- [Drupal7 Nginx](#)
- [Drupal Nginx](#)
- [Drupal](#)
- [Drupal](#)
- [Gmail API](#)
- [Pathauto](#)
- [Field Validation](#)
- [Feeds](#)
- [ShURLy](#)
- [Custom Twig Formatter](#)
- [Easy Breadcrumb](#)
- [amp](#)
- [Backup and Migrate](#)
- [YouTube Embed Formatter](#)
- [Drupal](#)
- [Drupal7](#)
- [Nginx FastCGI](#)
- [AMP](#)
- [conf](#)
- [Drupal7 Optimizing](#)
- [Views PHP](#)
- [Drupal](#)
- [Draupl 9](#)
- [Drupal 10](#)
- [composer](#)
- [Drupal 10](#)

- █████
- ███████████████ (docker)
- drupal 10 drupal 11
- ████
- Docker Drupal 11 Php8.3

Drupal7 Nginx

```
server {  
    server_name site.com;  
    root /var/www/site; ## <-- Your only path reference.  
  
    location = /favicon.ico {  
        log_not_found off;  
        access_log off;  
    }  
  
    location = /robots.txt {  
        allow all;  
        log_not_found off;  
        access_log off;  
    }  
  
    location = /ads.txt {  
        allow all;  
        log_not_found off;  
        access_log off;  
    }  
  
    # Very rarely should these ever be accessed outside of your lan  
    location ~* \.(txt|log)$ {  
        allow 192.168.0.0/16;  
        deny all;  
    }  
  
    location ~ \..*/.*\.php$ {  
        return 403;  
    }  
  
    location ~ ^/sites/.*private/ {  
        return 403;  
    }  
}
```

```
# Block access to scripts in site files directory
location ~ ^/sites/[^/]+/files/.*\!.php$ {
    deny all;
}

# Allow "Well-Known URLs" as per RFC 5785
location ~* ^/.well-known/ {
    allow all;
}

# Block access to "hidden" files and directories whose names begin with a
# period. This includes directories used by version control systems such
# as Subversion or Git to store control files.
location ~ (^|/)\. {
    return 403;
}

location / {
    # try_files $uri @rewrite; # For Drupal <= 6
    try_files $uri /index.php?$query_string; # For Drupal >= 7
}

location @rewrite {
    rewrite ^/(.*)$ /index.php?q=$1;
}

# Don't allow direct access to PHP files in the vendor directory.
location ~ /vendor/.*\!.php$ {
    deny all;
    return 404;
}

# In Drupal 8, we must also match new paths where the '.php' appears in
# the middle, such as update.php/selection. The rule we use is strict,
# and only allows this pattern with the update.php front controller.
# This allows legacy path aliases in the form of
# blog/index.php/legacy-path to continue to route to Drupal nodes. If
# you do not have any paths like that, then you might prefer to use a
# laxer rule, such as:
# location ~ \.php(/|$) {
```

```

# The laxer rule will continue to work if Drupal uses this new URL
# pattern with front controllers other than update.php in a future
# release.

location ~ '\.php$|^/update.php' {
    fastcgi_split_path_info ^(.+?\.\php)(|/.*)$;
    # Security note: If you're running a version of PHP older than the
    # latest 5.3, you should have "cgi.fix_pathinfo = 0;" in php.ini.
    # See http://serverfault.com/q/627903/94922 for details.

    include fastcgi_params;

    # Block httpoxy attacks. See https://httpoxy.org/.

    fastcgi_param HTTP_PROXY "";
    fastcgi_param SCRIPT_FILENAME $document_root$fastcgi_script_name;
    fastcgi_param PATH_INFO $fastcgi_path_info;
    fastcgi_param QUERY_STRING $query_string;
    fastcgi_intercept_errors on;
    # PHP 5 socket location.

    #fastcgi_pass unix:/var/run/php5-fpm.sock;
    # PHP 7 socket location.

    fastcgi_pass unix:/var/run/php/php7.4-fpm.sock;
}

# Fighting with Styles? This little gem is amazing.

# location ~ ^/sites/.*files/imagecache/ { # For Drupal <= 6
location ~ ^/sites/.*files/styles/ { # For Drupal >= 7
    try_files $uri @rewrite;
}

# Handle private files through Drupal. Private file's path can come
# with a language prefix.

location ~ ^(/[a-zA-Z-]+)?/system/files/ { # For Drupal >= 7
    try_files $uri /index.php?$query_string;
}

## PWA serviceworker support.

location ~ ^/pwa/[0-9a-z]+/serviceworker.js {
    try_files $uri /index.php?$query_string;
}

location ~* \.(js|css|png|jpg|jpeg|gif|ico|svg|woff)$ {
    expires max;
}

```

```
    log_not_found off;  
    access_log off;  
}  
  
}
```

Drupal Nginx

```
server {  
    server_name site.com;  
    root /var/www/site/web; ## <-- Your only path reference.  
  
    location = /favicon.ico {  
        log_not_found off;  
        access_log off;  
    }  
  
    location = /robots.txt {  
        allow all;  
        log_not_found off;  
        access_log off;  
    }  
  
    # Very rarely should these ever be accessed outside of your lan  
    location ~* \.(txt|log)$ {  
        allow 192.168.0.0/16;  
        deny all;  
    }  
  
    location ~ \..*/.*\php$ {  
        return 403;  
    }  
  
    location ~ ^/sites/.*private/ {  
        return 403;  
    }  
  
    # Block access to scripts in site files directory  
    location ~ ^/sites/[^\]+/files/.*\php$ {  
        deny all;  
    }  
  
    # Allow "Well-Known URLs" as per RFC 5785
```

```
location ~* ^/.well-known/ {
    allow all;
}

# Block access to "hidden" files and directories whose names begin with a
# period. This includes directories used by version control systems such
# as Subversion or Git to store control files.

location ~ (^|/)\. {
    return 403;
}

location / {
    # try_files $uri @rewrite; # For Drupal <= 6
    try_files $uri /index.php?$query_string; # For Drupal >= 7
}

location @rewrite {
    #rewrite ^/(.*)$ /index.php?q=$1; # For Drupal <= 6
    rewrite ^ /index.php; # For Drupal >= 7
}

# Don't allow direct access to PHP files in the vendor directory.

location ~ /vendor/.*\!.php$ {
    deny all;
    return 404;
}

# Protect files and directories from prying eyes.

location ~*
\.(engine|inc|install|make|module|profile|po|sh|.*sql|theme|twig|tpl(\.php)?|xtpl|yml)(~|\!.sw[op]|\!.bak|\!.orig|\!.sa
ve)?$|^(\.(?!well-
known).*|Entries.*|Repository|Root|Tag|Template|composer\.(json|lock)|web\!.config)$|^#.*\#\$|\!.php(~|\!.sw[op]|\!
bak|\!.orig|\!.save)$ {
    deny all;
    return 404;
}

# In Drupal 8, we must also match new paths where the '.php' appears in
# the middle, such as update.php/selection. The rule we use is strict,
# and only allows this pattern with the update.php front controller.
```

```

# This allows legacy path aliases in the form of
# blog/index.php/legacy-path to continue to route to Drupal nodes. If
# you do not have any paths like that, then you might prefer to use a
# laxer rule, such as:
# location ~ \.php(/|$) {
# The laxer rule will continue to work if Drupal uses this new URL
# pattern with front controllers other than update.php in a future
# release.

location ~ '\.php$|^/update.php' {
    fastcgi_split_path_info ^(.+?\.\php)(|.*$);
    # Ensure the php file exists. Mitigates CVE-2019-11043
    try_files $fastcgi_script_name =404;
    # Security note: If you're running a version of PHP older than the
    # latest 5.3, you should have "cgi.fix_pathinfo = 0;" in php.ini.
    # See http://serverfault.com/q/627903/94922 for details.
    include fastcgi_params;
    # Block httpoxy attacks. See https://httpoxy.org/.
    fastcgi_param HTTP_PROXY "";
    fastcgi_param SCRIPT_FILENAME $document_root$fastcgi_script_name;
    fastcgi_param PATH_INFO $fastcgi_path_info;
    fastcgi_param QUERY_STRING $query_string;
    fastcgi_intercept_errors on;
    # PHP 5 socket location.
    #fastcgi_pass unix:/var/run/php5-fpm.sock;
    # PHP 7 socket location.
    fastcgi_pass unix:/var/run/php/php8.2-fpm.sock;
}

location ~* \.(js|css|png|jpg|jpeg|gif|ico|svg)$ {
    try_files $uri @rewrite;
    expires max;
    log_not_found off;
}

# Fighting with Styles? This little gem is amazing.
# location ~ ^/sites/.*/files/imagecache/ { # For Drupal <= 6
location ~ ^/sites/.*/files/styles/ { # For Drupal >= 7
    try_files $uri @rewrite;
}

```

```
# Handle private files through Drupal. Private file's path can come
# with a language prefix.

location ~ ^(/[a-z\-\-]+)?/system/files/ { # For Drupal >= 7
    try_files $uri /index.php?$query_string;
}

# Enforce clean URLs

# Removes index.php from urls like www.example.com/index.php/my-page --> www.example.com/my-page
# Could be done with 301 for permanent or other redirect codes.

if ($request_uri ~* "^(.*\/)index\.php(.*$)") {
    return 307 $1$2;
}
}
```

<https://www.nginx.com/resources/wiki/start/topics/recipes/drupal/>

□□ Drupal□□□□

□□ composer□ drush

□□ composer

```
curl -sS https://getcomposer.org/installer | sudo php -- --install-dir=/usr/local/bin --filename=composer
```

□□ drush(□□ 8.2.3)

```
composer global require drush/drush:8.2.3
alias drush='/usr/bin/php ~/.config/composer/vendor/drush/drush/drush.php'
drush init
```

□□ Drupal7

```
composer create-project drupal/recommended-project:7.x drupal
```

□□□□□

```
chown -R www-data:www-data /var/www/drupal/web
```

□□

```
composer self-update --1
update-alternatives --set php /usr/bin/php7.4
cd /var/www/drupal
drush pm-update -y;drush updatedb;drush l10n-update-refresh;drush l10n-update;drush cc all
composer self-update --2
update-alternatives --set php /usr/bin/php8.1
```

□□ Drupal7□□□□□
□□□□□□□□□□

Drupal7□ Drupal10□□□ php7.4□ php8.x

□□ Drupal

```
composer create-project drupal/recommended-project drupal
```

□□ drush

```
cd drupal  
composer require drush/drush  
composer update
```



```
chown -R www-data:www-data web
```



```
composer update  
drush updatedb  
drush cr
```



```
composer require 'drupal/pathauto:^1.12'
```



<https://www.drupal.org/project/pathauto>



drusn en pathauto



```
composer remove drupal/pathauto
```



composer

Drupal 8

composer

Drupal8

Drupal 7

Drupal 7

D6 D7

Drupal7

████████████████████████

XD

████


Drupal████████

drupal████ demo████████████████

Drupal

<https://github.com/drupalcommerce/demo-project>

Drupal

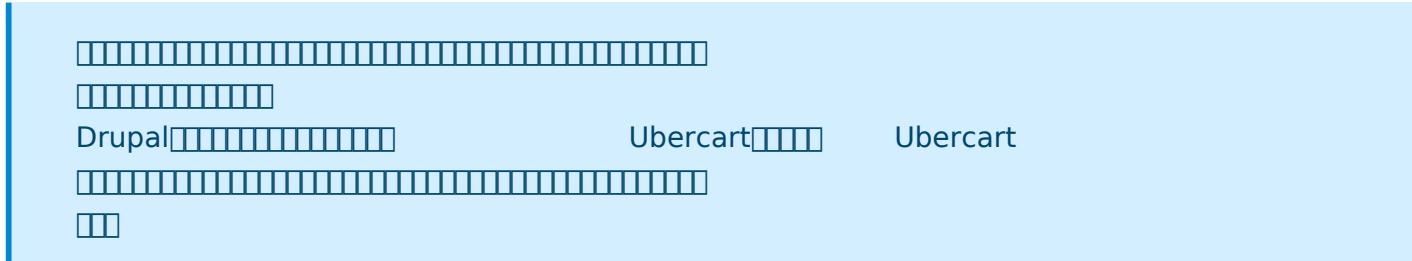

Drupal

2022 5 (10)

Drupal6 + Ubercart

1

Drupal

WooCommerce

WordPress

WooCommerce


Drupal

Drupal

WordPress

BookStack

XD



Drupal 项目



Gmail API

<https://www.drupal.org/project/gmail>



Pathauto

<https://www.drupal.org/project/pathauto>



Field Validation

https://www.drupal.org/project/field_validation



Feeds

<https://www.drupal.org/project/feeds>



ShURLy

<https://www.drupal.org/project/shurly>



Custom Twig Formatter

https://www.drupal.org/project/custom_twig_formatter

□□□□□□□□□ field_imageurl □□□□□□□□□

```
{ { field_imageurl.value } }
```

□□□□□□□ https://

```
{ { field_imageurl.value|replace({'https://': ''}) } }
```

□□□ html□□□

```

```

□□□□□□□ Custom Formatters □□



Easy Breadcrumb

https://www.drupal.org/project/easy_breadcrumb

□□□□□□□□ (□□□)

 easy_breadcrumb + pathauto

book [title] /book/[title] /book [title]

/book  views block 

□□ > book > □□□

□

amp

<https://www.drupal.org/project/amp>

□□□ Drupal □ amp □□□

□□ AMP □□

```
composer require drupal/amp
composer require drupal/amptheme
composer require drupal/stable
```



□□□ admin/appearance □□
ExAMPlE Subtheme

□□ AMP

□□□ admin/config/services/amp

□□□□□ ExAMPlE Subtheme □□□□□

□□□□□ AMP□□□□□□□□□□□□□ AMP□□□

□□□□□□□□□□□□□ "?amp" □□□ amp□□□□□

□□□□□□□□□

amp□□□□□□□

<https://search.google.com/test/amp>



<https://search.google.com/test/amp>

5

amp

block



A horizontal row of 20 empty square boxes for writing responses.

amp-ad [] amp-ad extension script []

JavaScript

 amp

amp

AMP Feeds Extensible Parsers QueryPath JSON parser



Backup and Migrate

https://www.drupal.org/project/backup_migrate

```
mkdir private;chown -R www-data:www-data private/;composer require 'drupal/backup_migrate:^5.0';drush en  
backup_migrate;echo "\$settings['file_private_path'] = '../private';" | tee -a web/sites/default/settings.php
```



□

YouTube Embed Formatter

□□□□□□□□□ (youtube_id) □□□□□

/web/modules/contrib/ □□□□□ youtube_embed

□□□□□□□ youtube_embed.info.yml

```
name: 'YouTube Embed Formatter'  
type: module  
description: 'Formats a field containing a YouTube ID as an embedded video.'  
core_version_requirement: ^10|^11  
package: Custom  
dependencies:  
- field
```

mkdir -p src/Plugin/Field/FieldFormatter/

cd src/Plugin/Field/FieldFormatter/

□□□□□ YouTubeEmbedFormatter.php

```
<?php  
  
namespace Drupal\youtube_embed\Plugin\Field\FieldFormatter;  
  
use Drupal\Core\Field\FormatterBase;  
use Drupal\Core\Field\FieldItemListInterface;  
use Drupal\Core\Form\FormStateInterface;  
use Drupal\Core\Plugin\ContainerFactoryPluginInterface;  
  
/**  
 * Plugin implementation of the 'youtube_embed' formatter.  
 *  
 * @FieldFormatter(  
 *   id = "youtube_embed_formatter",  
 *   label = @Translation("YouTube Embed with RWD and Autoplay"),  
 *   field_types = {
```

```

*   "string",
*   "string_long"
* }
* )
*/
class YouTubeEmbedFormatter extends FormatterBase {

/**
 * {@inheritDoc}
 */
public function viewElements(FieldItemListInterface $items, $langcode) {
$elements = [];

foreach ($items as $delta => $item) {
// YouTube ID
$youtube_id = trim($item->value);

// RWD iframe
$elements[$delta] = [
'#type' => 'markup',
'#markup' => '<div class="youtube-video-wrapper"><iframe src="https://www.youtube.com/embed/' .
htmlspecialchars($youtube_id, ENT_QUOTES, 'UTF-8') . '?autoplay=1&mute=0" frameborder="0" allowfullscreen></iframe></div>',
'#allowed_tags' => ['iframe', 'div'],
];
}

return $elements;
}
}

```


YouTube CSS RWD

```

<style>
/* YouTube CSS */
.youtube-video-wrapper {
position: relative;
padding-bottom: 56.25%; /* 16:9 */
height: 0;
overflow: hidden;

```

```
max-width: 100%;  
background: #000;  
margin-bottom: 20px; /* □ */  
}  
  
.youtube-video-wrapper iframe {  
position: absolute;  
top: 0;  
left: 0;  
width: 100%;  
height: 100%;  
}  
</style>
```



Drupal

□□□□□

Drupal□□□□□

WordPress

□□□□□□□□□□□□□□□□□□□□

WordPress□□□□

□□□□

Drupal□ Views + Block □□□□□□□□□□□□□□

WordPress□

WordPress□□

function□□ shortcode□□□□□□□□□□□□

AI

□□□□□

WordPress□□□□□□□□□□□□

php□□□

Drupal7



Drupal7 用法

□ Nginx FastCGI □ AMP □□□ conf

□□□□□□□□□□

drupal□□□□□□□□□□

amp□□□□□□□□□□

□□□□□

*?amp□□□□□□□□□□□□□□

drupal□ cookie□ ?

```
fastcgi_cache_path /etc/nginx/cache levels=1:2 keys_zone=tainanoutook:200m max_size=10g inactive=2h
use_temp_path=off;
fastcgi_cache_key "$scheme$request_method$host$request_uri";
fastcgi_ignore_headers Cache-Control Expires Set-Cookie;

set $skip_cache 1;

if ($request_uri ~* ".*?amp") {
    set $skip_cache 0;
}

include snippets/fastcgi-php.conf;
fastcgi_cache tainanoutook;
fastcgi_cache_valid 200 301 302 2h;
fastcgi_cache_use_stale error timeout updating invalid_header http_500 http_503;
fastcgi_cache_min_uses 1;
fastcgi_cache_lock on;
fastcgi_cache_bypass $skip_cache;
fastcgi_no_cache $skip_cache;
add_header X-FastCGI-Cache $upstream_cache_status;
```

Drupal7 五

Drupal7 Optimizing 五

五 chained_fast apcu registry_autoload xautoload

```
drush en chained_fast apcu registry_autoload xautoload expire -y
```

```
vi sites/default/settings.php
```

```
$conf['cache_backends'][] = 'sites/all/modules/apcu/apcu.cache.inc';
$conf['cache_backends'][] = 'sites/all/modules/chained_fast/chained_fast.cache.inc';

// Chained fast configuration.
$conf['chained_fast']['fast_backend'] = 'DrupalAPCuCache';

// Cache class configuration - This uses chained_fast for all caches except the form cache. This might not be
// suitable for all sites, but is a good default.
$conf['cache_default_class'] = 'ChainedFastBackend';
$conf['cache_class_cache_form'] = 'DrupalDatabaseCache';
```

admin/config/development/performance 五

五

五

五

CSS 五

五 JavaScript 五

Self-updating APCu classmap (*) (Running and available)

APC (Running and available)

APCu (Running and available)

XCache (Not currently available)

Self-updating database classmap (*) (Running and available)

Postpone registration of module namespaces until the first cache miss (recommended)

Replace core class loader.

expire (Cache Expiration) 五

Status of implementation 五 Internal expiration

Modules that support external expiration 五 Include base URL in expires

Node expiration Node actions 五

PS. 五

Drupal

□□□□

Views PHP

Drupal 7 ̄̄̄̄̄ views ̄̄̄̄̄ php ̄̄̄̄̄ https://www.drupal.org/project/views_php

̄̄̄̄̄ : field_dow

```
<?php
// $data ̄̄̄̄̄
$field_dow = $data->_field_data['nid']['entity']->field_dow['und'];

// [field_dow] ̄̄̄̄̄
$dow_values = array_map(function($item) {
    return $item['value'];
}, $field_dow);

// ̄̄̄̄̄
echo implode(', ', $dow_values);
?>
```

field_dow ̄̄̄̄̄ 1 ̄̄̄̄̄ 7 ̄̄̄̄̄ ̄̄̄̄̄ ̄̄̄̄̄

```
<?php
// $data ̄̄̄̄̄
$field_dow = $data->_field_data['nid']['entity']->field_dow['und'];

// ̄̄̄̄̄
$weekdays = [
    1 => 'Monday',
    2 => 'Tuesday',
    3 => 'Wednesday',
    4 => 'Thursday',
    5 => 'Friday',
    6 => 'Saturday',
    7 => 'Sunday'
];
```

```
// [field_dow] 週間曜日名  
$dow_names = array_map(function($item) use ($weekdays) {  
    return $weekdays[$item['value']];  
}, $field_dow);  
  
// 結果  
echo implode(', ', $dow_names);  
?>
```

週間曜日名

Views Day of Week (views_dow)

週間曜日名

Drupal



Drupal 9

Draupl 9

Drupal 10

█████████████████████

composer update ██████████

Drupal 10

██████

composer.json

^9.5 || ^10.0

Drupal 项目

composer

Drupal 项目 composer 项目

composer.json

composer.json

composer.json

Drupal 项目

Drupal Drush

```
composer create-project drupal/recommended-project drupal
```

```
cd drupal
```

```
chown -R www-data:www:drupal
```

```
composer require drush/drush
```

composer.json

```
composer require 'drupal/paragraphs:^1.14'
```

```
drush en paragraphs
```

composer.json

/admin/modules/uninstall composer.json

composer.json

```
composer remove drupal/paragraphs
```

Drupal 项目

```
composer update
```

composer.json

drush composer.json

PS. composer.json

composer update composer.json

token

composer.json

composer require drupal/token composer.json

drush

updatedb;drush cr

```
drush updatedb
```

```
drush cr
```

composer update composer.json

composer update composer.json

composer update composer.json

php-fpm

composer 五五五

```
composer self-update --2
update-alternatives --set php /usr/bin/php8.1
export COMPOSER_ALLOW_SUPERUSER=1
cd /var/www/mysite/
composer update;drush updatedb -y;drush cr
```

Drupal

Drupal 10

Drupal

admin/reports/status

pass



Update notifications are not enabled. It is highly recommended that you install the Update Manager module from the module administration page in order to stay up-to-date on new releases. For more information, Update status handbook page.

drush cdel update.settings

admin/modules
Update Manager

Trusted Host Settings

The trusted_host_patterns setting is not configured in settings.php. This can lead to security vulnerabilities. It is highly recommended that you configure this. See Protecting against HTTP HOST Header attacks for more information.

https://www.drupal.org/docs/getting-started/installing-drupal/trusted-host-settings

```
$settings['trusted_host_patterns'] = [  
  '^.+\\.example\\.com\\.tw$',  
];
```

Drupal



Drupal

□

/admin/config/regional/settings

□□□□□

□□□

/admin/reports/translations

□□□

□□

/admin/config/development/performance

□□

□□□□□□□□□□□□□□□

Drupal 10.4.1



(docker)

□ /admin/reports/status

□□□□□□□□□□ 1 □□□□□□□□□□□□□□



Trusted Host Settings

docker □□□□□

```
docker exec -it dp-drupal-1 bash -c "echo '\$settings[\"trusted_host_patterns\"] = [\"^.+\\.yoursite\\.com$\"];' >> /opt/drupal/web/sites/default/settings.php"
```

bash

```
echo '\$settings[\"trusted_host_patterns\"] = [\"^.+\\.yoursite\\.com$\"];' >> /opt/drupal/web/sites/default/settings.php
```



Output buffering

```
docker exec -it dp-drupal-1 bash -c "echo 'output_buffering=On' > /usr/local/etc/php/conf.d/custom-php.ini"
```

```
docker exec -it dp-drupal-1 service apache2 restart
```

□□□□□□□□

```
drush cdel update.settings
```

 admin/modules

 Update Manager

PHP APCu available caching



```
docker exec -it dp-drupal-1 bash
```



```
pecl install apcu
```



```
pecl install uploadprogress
```



□ /usr/local/etc/php/conf.d/custom-php.ini □

extension=uploadprogress.so

extension=apcu.so

██████ docker ████████

APCu

A horizontal row of 20 empty blue rectangular boxes, likely a placeholder for a diagram or figure.

██████ docker ██████████ docker █████████████████████████

Drupal□□□

drupal 10 □ drupal 11□

composer why-not drupal/core 11.1.0

□

composer why-not drupal/core 11.1.0

drupal/core-recommended 10.4.0 requires drupal/core (10.4.0)

drupal/core 11.1.0 requires symfony/console (^7.2)

drupal/recommended-project - does not require symfony/console (but v6.4.15 is installed)

drupal/core 11.1.0 requires symfony/dependency-injection (^7.2)

drupal/recommended-project - does not require symfony/dependency-injection (but v6.4.16 is installed)

drupal/core 11.1.0 requires symfony/event-dispatcher (^7.2)

drupal/recommended-project - does not require symfony/event-dispatcher (but v6.4.13 is installed)

drupal/core 11.1.0 requires symfony/filesystem (^7.2)

drupal/recommended-project - does not require symfony/filesystem (but v6.4.13 is installed)

drupal/core 11.1.0 requires symfony/finder (^7.2)

drupal/recommended-project - does not require symfony/finder (but v6.4.13 is installed)

drupal/core 11.1.0 requires symfony/http-foundation (^7.2)

drupal/recommended-project - does not require symfony/http-foundation (but v6.4.16 is installed)

drupal/core 11.1.0 requires symfony/http-kernel (^7.2)

drupal/recommended-project - does not require symfony/http-kernel (but v6.4.16 is installed)

drupal/core 11.1.0 requires symfony/mailer (^7.2)

drupal/recommended-project - does not require symfony/mailer (but v6.4.13 is installed)

drupal/core 11.1.0 requires symfony/mime (^7.2)

drupal/recommended-project - does not require symfony/mime (but v6.4.13 is installed)

drupal/core 11.1.0 requires symfony/routing (^7.2)

drupal/recommended-project - does not require symfony/routing (but v6.4.16 is installed)

drupal/core 11.1.0 requires symfony/serializer (^7.2)

drupal/recommended-project - does not require symfony/serializer (but v6.4.15 is installed)

drupal/core 11.1.0 requires symfony/validator (^7.2)

drupal/recommended-project - does not require symfony/validator (but v6.4.16 is installed)

drupal/core 11.1.0 requires symfony/process (^7.2)

drupal/recommended-project - does not require symfony/process (but v6.4.15 is installed)

drupal/core 11.1.0 requires symfony/yaml (^7.2)

drupal/recommended-project - does not require symfony/yaml (but v6.4.13 is installed)

drupal/core 11.1.0 requires doctrine/annotations (^2.0)

drupal/recommended-project - does not require doctrine/annotations (but 1.14.4 is installed)

drupal/core 11.1.0 requires symfony/psr-http-message-bridge (^7.2)

drupal/recommended-project - does not require symfony/psr-http-message-bridge (but v6.4.13 is installed)

Not finding what you were looking for? Try calling `composer update "drupal/core:11.1.0" --dry-run` to get another view on the problem.

████

composer require drupal/core-recommended:^11.0 --update-with-all-dependencies

████

Problem 1

- Root composer.json requires drupal/core-recommended ^11.0 -> satisfiable by drupal/core-recommended[11.0.0, ..., 11.1.0].

- drupal/core-recommended[11.0.0, ..., 11.0.9] require symfony/console ~v7.1.3 -> found symfony/console[v7.1.3, ..., v7.1.8] but these were not loaded, likely because it conflicts with another require.

- drupal/core-recommended 11.1.0 requires symfony/console ~v7.2.0 -> found symfony/console[v7.2.0, v7.2.1] but these were not loaded, likely because it conflicts with another require.

rm composer.lock


rm -rf vendor/

████

composer require drupal/core-recommended:^11.0 --update-with-all-dependencies

████ drush updatedb ; drush cr

□□□□□□□



nginx log

nginx log

```
cat /var/log/nginx/error.log
```

drush

drush

```
drush config:set system.theme default olivero
```

bartik

Docker | Drupal 11

PHP8.3

Yaml

```
# Drupal 11 with MySQL and PHP 8.3
#
# Access via "http://localhost:8080"
# (or "http://$(docker-machine ip):8080" if using docker-machine)
#
# During initial Drupal setup,
# Database type: MySQL
# Database name: drupal
# Database username: root
# Database password: example
# ADVANCED OPTIONS; Database host: mysql
version: '3.1'

services:
  drupal:
    image: drupal:11-apache
    ports:
      - 8080:80
    environment:
      PHP_VERSION: "8.3"
    volumes:
      - /var/www/html/modules
      - /var/www/html/profiles
      - /var/www/html/themes
      - /var/www/html/sites
    restart: always
  mysql:
    image: mysql:8.0
    environment:
      MYSQL_ROOT_PASSWORD: example
      MYSQL_DATABASE: drupal
```

```
restart: always
```

Nginx conf

```
server {  
    server_name www.yoursite.com;  
    location / {  
        proxy_pass http://127.0.0.1:8080;  
        proxy_set_header Host $host;  
        proxy_set_header X-Real-IP $remote_addr;  
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;  
        proxy_set_header X-Forwarded-Proto $scheme;  
    }  
}
```



████████ composer drush ██████████

████ 7zip composer █████

```
docker exec -it dp-drupal-1 apt update
```

```
docker exec -it dp-drupal-1 apt install unzip
```

████ drush ████████

```
docker exec -it dp-drupal-1 composer require drush/drush
```



```
docker exec -it dp-drupal-1 composer update
```



```
docker exec -it dp-drupal-1 drush updatedb
```

```
docker exec -it dp-drupal-1 drush cr
```